


SPECIFICATIONS

Dimensions	Length: 1213 mm Width: 176 mm Thickness: 5(0.55)mm
Box	11 planks 2.348 sqm 20 kg
Pallet	50 boxes
Unique planks	20 planks
Surface	Deep embossed
Wear class	Intensive commercial use (class 33)
Standard colours	Rye, Amaranth, Barley, Oat, Roasted Bean, Malt, Cane, Flax
Bevel	4V bevel
Gloss	5 %
Locking system	Tight lock click system
Type of installation	Floating

STRUCTURE

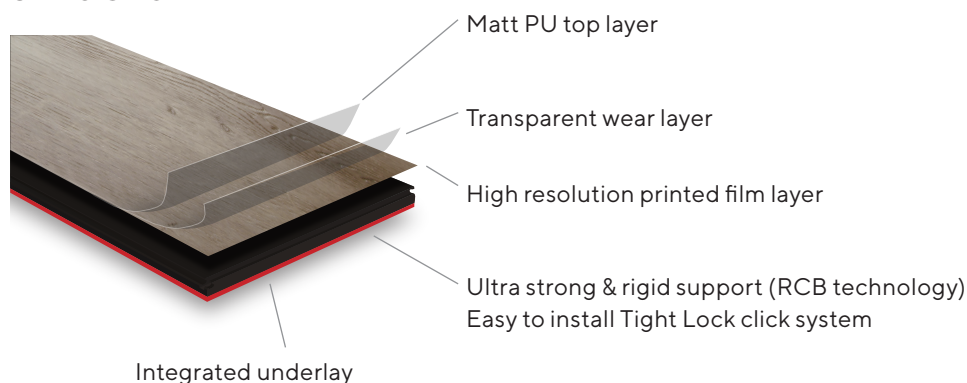

INSTALLATION



PRODUCT CHARACTERISTICS - General

Factor	Standard - EN 14041:2004 + AC:2006
Reaction to fire	Bfl-S1
Volume mass density	1650 kg/m ³
Formaldehyde emission	E1
PCP	< 0.5 ppm
Slipperiness	DIN 51130: R10 - EN 13893: DS
Thermal resistance	0,042 m ² K/W
Thermal conductivity	0,116 W/(m.K)
Reduction sound transmission	■ 18dB
Wear resistance	Group T
Resistance to staining	Result 1
Surface strength	-
Floorheating	Allowed, according to specific standards