


SPECIFICATIONS

Dimensions	Length: 615 mm Width: 615 mm Thickness: 6.5 (0.55) mm
Box	4 tiles 1.513 m ² 18 kg
Pallet	54 boxes
Different tiles	8 tiles
Surface	Stone embossed
Wear class	Intensive commercial use (class 33)
Standard colours	Basalt, Stone, Seasalt
Bevel	Painted 4V bevel
Gloss	5 %
Locking system	Tight lock click system
Type of installation	Floating

STRUCTURE

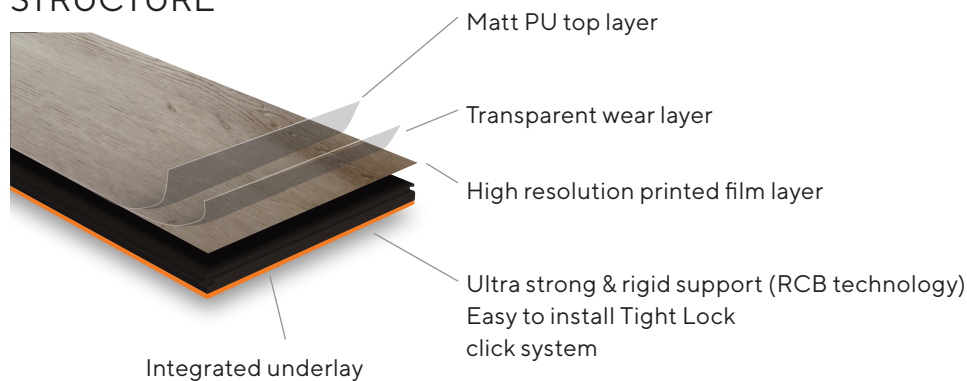

INSTALLATION



PRODUCT CHARACTERISTICS - General

Factor	Standard - EN 14041:2004 + AC:2006
Reaction to fire	Bfl-S1
Volume mass density	1650 kg/m ³
Formaldehyde emission	E1
PCP	< 0.5 ppm
Slipperiness	DIN 51130: R10 - EN 13893: DS
Thermal resistance	0,042 m ² K/W
Thermal conductivity	0,116 W/(m.K)
Reduction sound transmission	■ 18dB
Wear resistance	Group T
Resistance to staining	Result 1
Floorheating	Allowed, according to specific standards