


SPECIFICATIONS

Dimensions	Length: 600 mm Width: 300 mm Thickness: 5(0.55)mm
Box	13 tiles 2.340 m ² 19.5 kg
Pallet	54 boxes
Unique tiles	12 (Stone) - 16 (Basalt & Seasalt)
Surface	Stone embossed
Wear class	Intensive commercial use (class 33)
Standard colours	Basalt, Stone, Seasalt
Bevel	Painted 4V bevel
Gloss	5 %
Locking system	Tight lock click system
Type of installation	Floating

STRUCTURE

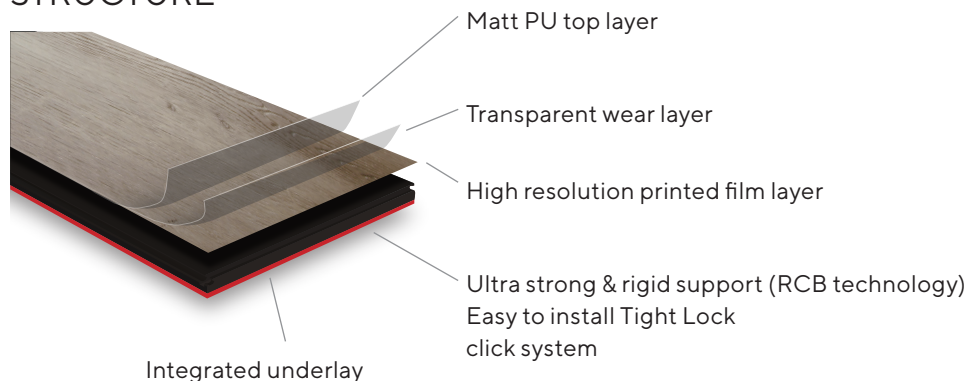

INSTALLATION



PRODUCT CHARACTERISTICS - General

Factor	Standard - EN 14041:2004 + AC:2006
Reaction to fire	Bfl-S1
Volume mass density	1650 kg/m ³
Formaldehyde emission	E1
PCP	< 0.5 ppm
Slipperiness	DIN 51130: R10 - EN 13893: DS
Thermal resistance	0,042 m ² K/W
Thermal conductivity	0,116 W/(m.K)
Reduction sound transmission	■ 18dB
Wear resistance	Group T
Resistance to staining	Result 1
Floorheating	Allowed, according to specific standards